



CHEMA FOAM

BUILD YOUR DREAM

CHEMA PROOF 105

Chema Proof 105 is a one component cementitious waterproofing powder containing polymer powder, special additives and special aggregate fillers. Mixed on site with water only and easily applied by brush or trowel.



Product Data

Colour	Grey
Characteristics	Cementitious grey powder (one component)
Packaging	25 kg
Mixing Ratio	Water : Powder 1 : 3 (By brush) - 1 : 5 (By trowel)
Density	1.8 kg/l
Shelf life	12 months when unopened
Storage	<ul style="list-style-type: none"> - Store material in a clean dry area protected from high humidity, moisture, direct sunlight and extreme heat and cold. - Unopened packs can be stored for 12 months. - Use oldest material first.

Technical Data

Description	Specifications	Unit	Values
Compressive strength	ASTM C109	kg/ cm2	>345
Bond Strength	EN 1542	n/mm ²	1.28
Water penetration under pressure	DIN 1048	bars	Nil (at 2mm thickness) at 5
Working time		minutes @ 25C°	30

Chema Proof 105 is a one component cementitious waterproofing powder containing polymer powder, special additives and special aggregate fillers. Mixed on site with water only and easily applied by brush or trowel.


PROPERTIES



PROPERTIES

- Resists hydrostatic pressure.
- Economical and Can be easily repaired
- Weather resistant
- Non-toxic and Eco-Friendly
- Resistant to chloride ion diffusion
- Good bond strength to different construction materials.


AREA OF USE

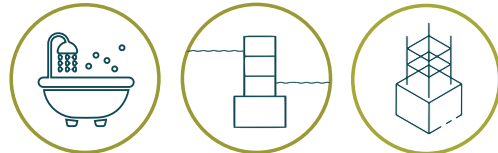

AREA OF USE

- cementitious Waterproofing for the protection of concrete structures including walls and floors in bathrooms, kitchens, balconies....etc.
- Foundations, retaining walls, and basements.

Mixing Ratio

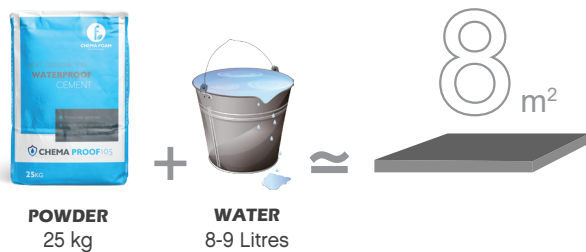

POWDER
25 kg

WATER
8-9 Litres

8 m²

INSTALLATION



- The second layer is painted after 5 to 6 hours and the first layer is completely dry.
- Must be Protected from rain for 48 hours before use.
- Do not use the product on expansion joints and dynamic cracks.
- We recommend applying a layer of protection after implementing the insulation.

OFFICE

Tel : (+202) 22 635 129 - 240 382 59
Fax : (+202) 22 609 332
11 Obour Buildings - Salah Salem
Nasr City Cairo - Egypt.

FACTORY

Tel : (+20554) 501243
Fax : (+20554) 501243
10th of Ramadan
B4 industrial zone

